


LCD Monitor



SPECS

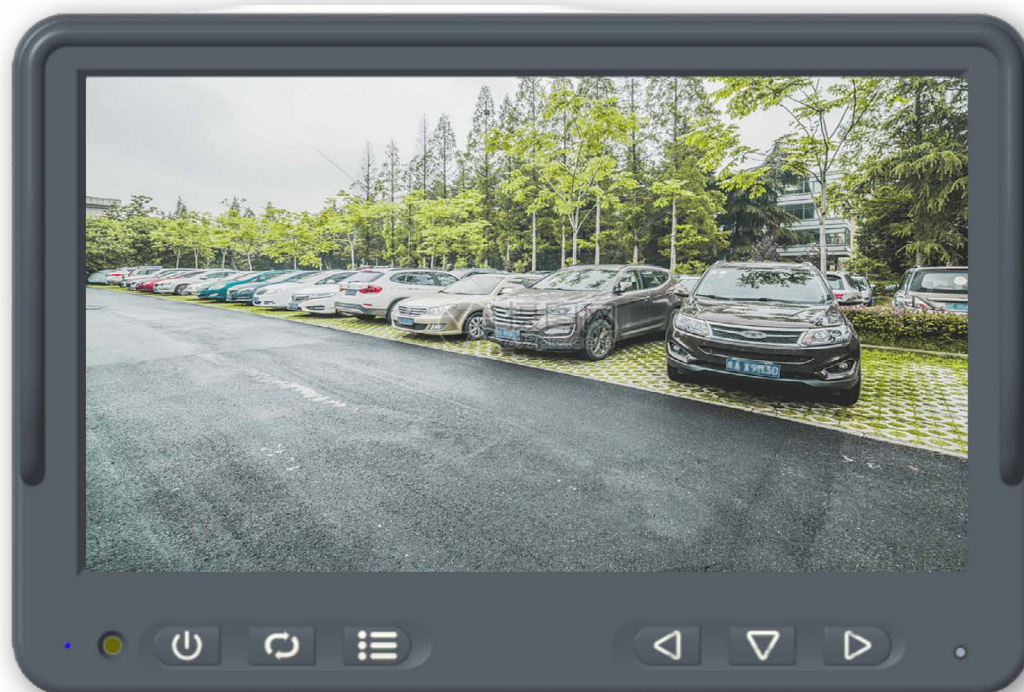

190 x 131 x 74,5 mm



-40°C ~+70°C


Features

- Supports 4-channel camera input
- Camera view is automatically set by trigger signal
- User-defined Power-On mode (include standby mode)
- Supports either an SD or an AHD camera on each input
- Cursor on the camera display when reversing or any other trigger signal input
- Mechanical button for enter/exit standby
- Display mode select and menu operations
- Auto-dimmer function

vestigeview.com

SPECIFICATIONS

Production model:DP7S	
Language	中文、English
Panel	
Size	7 inch IPS
Resolution	1024*600
Contrast Ratio	1000:1
Brightness	Max 1000cd/m2
View Angle	U:85°/D:85/ R/L:85°
Video&Audio	
Number of Video input	4 Camera,Supports either an SD or an AHD camera on each input
TV System	1080P30/1080P25/720P30/720P25/PAL/NTSC
Video Input	1.0Vp-p
Audio Output	None
Interface	
Trigger In	5 channel, Supports 36V withstand voltage, 3.9V threshold voltage
RS232	1 Channel
Power Supply	
Voltage Range	9-36V
Consumption	Static (without camera): 4W about Full: 24W about
Environment	
Working temperature	-30°C~+70°C (- 22°F~+158°F)
Storage temperature	-30°C~+80°C (- 22°F~+176°F)
Humidity	15% - 90%
IP Rating	IP30
Vibration Rating	2.17G
Shock Rating	80G

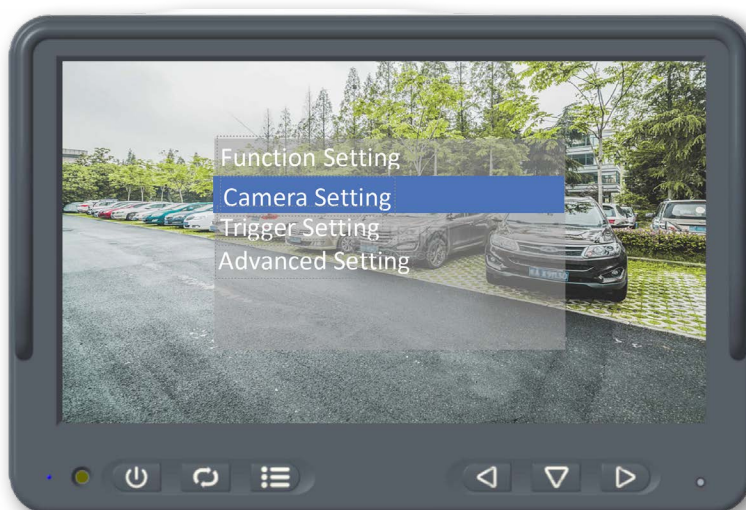

vestigeview.com